




STRIKER

BUILT TO LAST

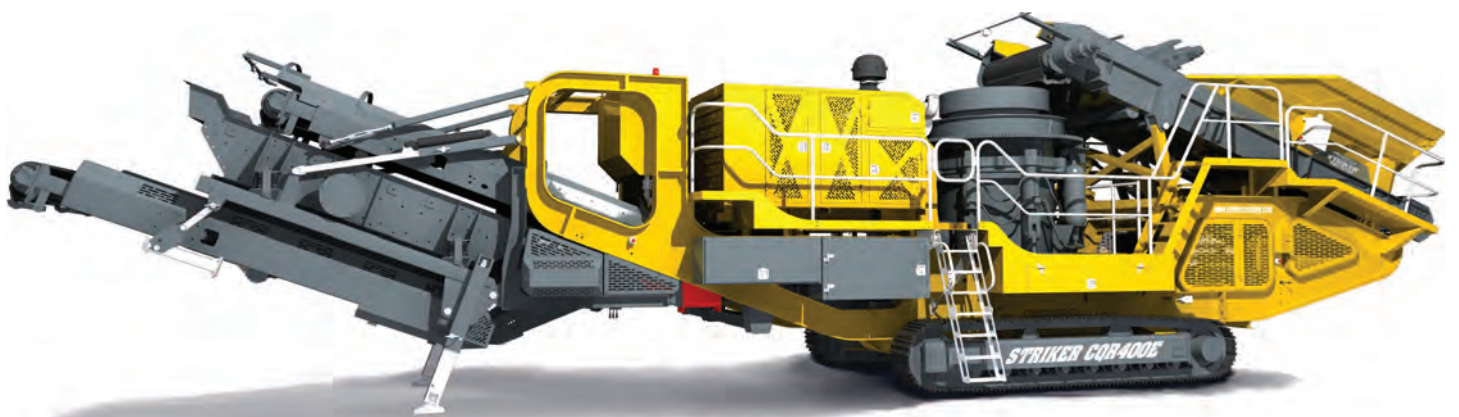

STRIKER CQR400E

Australia +61 8 9437 3533 | Malaysia +605 366 8188 | China +86-21-5446-1581
info@strikercrushing.com | www.strikercrushing.com

Unlimited Solutions
for Limited Resources

TRACKED CONE CRUSHER

CQR400E FEATURES



Belt Feeder - Feeding the material into the Cone Crusher is a belt feeder. Contained under the loading area are impact rollers for loading shock absorption while the heavy-duty feeder belt feeds the cone via a hydraulic variable speed drive motor. Fitted into the conveyor is a metal detector to protect the cone from tramp metal.

Feed Hopper - The feed hopper is manufactured from Hardox 400.

Forward Product Conveyor - The forward product conveyor is a 1200mm (3'11") wide, troughed belt conveyor with a fixed tail section and a discharge height of 2443mm (8') high. The belt is driven via a hydraulic drive motor.

Screen - 11ft x 5ft (3.2m x 1.5m) single deck vibrating screen. Fitted beneath the screen is a 1200mm (3'11") wide product conveyor. Fitted to the screen discharge is a transfer conveyor. The conveyor discharges onto the screen to cone returns conveyor.

Screen To Cone Transfer Conveyor - 500mm (1'8") wide troughed belt transfer conveyor. The conveyor is fed from the screen oversized transfer conveyor.

Track Frame - The track is manufactured from heavy-duty frame steel having 3840mm (12'7") longitudinal centres along with 400mm (1'4") wide tracks as a standard with an overall track width of 2860mm (9'5").

TECHNICAL SPECIFICATION

Feeder

Capacity - 5m³ / 7m³ (6yd³ / 9yd³)
Width - 1200mm (3'11")

Crusher

Size - 1200mm (47")

Forward Product Conveyor

Width - 1200mm (3'11")
Discharge Height - 2443mm (8')

Screen

Size - 3200mm x 1500mm (11' x 5') - Single Deck

Tracks

Length - 3840mm (12'7")
Width - 400mm (1'4")

Power Pack

Engine Power - CAT C4.4
Diesel Tank - 840Litre (185gal)
Hydraulic Tank - 600Litre (132gal)

Performance

Capacity (up to) - 400T/hr
Gap Setting - 10-50mm (0.39"-2")

Operating Dimension

Length - 17686mm (58')
Width - 4091mm (13'5")
Height - 4973mm (16'4")
Weight - 52T (114,640lbs)

Transport Dimension

Length - 18727mm (61'5")
Width - 3514mm (11'6")
Height - 3766mm (12'4")

Options:

Dust Suppression, Canvas Covers,
Water Pump

*Subject to change without prior notice.


Power Pack - CATERPILLAR model C4.4 engine with electronic governing and emission control powers the plant.

Cone - Striker is able to produce a machine with a unique combination of providing higher capacity and superior product quality. With proven revolutionary designs, the cones provide unbeatable performance on secondary, tertiary and quaternary applications and help achieve the highest possible levels of profitability. The cone offers the highest capacities for their size in the industry.

Technology allows the ability to operate at a fixed mechanical setting - instead of the head floating on a column of hydraulic oil - creates less drift and provides more stability throughout the circuit. These series of cone crushers enable the customer to produce a finer product with fewer crushing stages, lowering the capital costs and the amount of waste and also energy.

The cone offers such features dual-acting hydraulic tramp release cylinders, large clearing stroke, self-tightening helix on the upper section of the bowl liner and self-tightening lock bolts on the mantle. Hydraulic motors rotate the bowl for fine control setting adjustments with high performance, non contacting labyrinth seals providing high reliability by keeping out dust without wearing out.

There is excellent wear protection for all components on the crusher. The head ball, mainframe seat liners, mainframe pin bushings, countershaft box frame ring, counterweight guard, mainframe liners and dead-bed feed hopper are all replaceable items, keeping maintenance costs to a minimum.

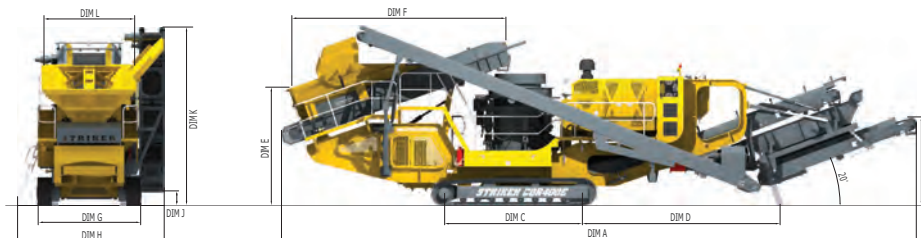

CQR400E	WORKING DIMENSIONS											TRANSPORT			
	A	B	C	D	E	F	G	H	J	K	L	WIDTH	HEIGHT	LENGTH	WEIGHT
METRIC	17686	2443	3840	5500	3264	5992	2860	4091	397	4973	2500	3514	3766	18727	52T
IMPERIAL	58'	8'	12' 7"	18' 1"	10' 9"	19' 8"	9' 5"	13' 5"	1' 4"	16' 4"	8' 2"	11' 6"	12' 4"	61' 5"	114,640lbs

*- Weight Variable With Options

While Striker Australia Pty Ltd makes every endeavour to ensure of the information presented in this brochure, we cannot be held liable in any way for any loss or damage for any inaccuracies or errors you may find. Striker Australia Pty Ltd cannot make any warranty as to the fitness of purpose of any goods, equipment or material in this brochure for your purposes and you must use your own endeavours and make your own enquiries in that regard.

SPO2SI538-2000