



STRIKER LD RANGE

Australia +61 8 9437 3533 | Malaysia +605 366 8188 | China +86-21-5446-1581 info@strikercrushing.com | www.strikercrushing.com





Unlimited Solutions for Limited Resources

Mobile Stacker Features

Striker LD Series radial stackers have high capacity stockpiling abilities. They are strong and economical to run with no complicated foundation work and literally have a quick set up time of typically under 1 hour. All Striker LD stackers are designed for easy transport and can be loaded as individual or in some cases multiple quantity into shipping containers for easy shipment.

Product Include:

- LD15 50ft (15m) radial wheeled conveyor fabricated from pressed side plates and incorporates a 3 roll idler set
- LD18 60ft (18m) radial wheeled conveyor fabricated from pressed side plates and incorporates a 3 roll idler set
- LD24 80ft (24m) radial wheeled conveyor fabricated from latticed frame and incorporates a 3 roll idler set

Conveyor Belt - Standard belt widths available from 650mm (26") up to 1050mm (42") depending on conveyor type.


Standard range conveyor comes hydraulically driven and hydraulically raises and lowers.

Conveyors are available as hydraulic coupling, electric or diesel self powered. Standard belt widths available from 800mm (32") up to 1050mm (42") depending on conveyor size. Belts are 3 ply Quarry grade.

Each conveyor is fitted with dual scrapers, one at the head end to clean the dirty side of the belt and one on the tail end to eject spillage from the internal side of the belt prior to the tail pulley.

Options

- CAT, JCB Diesel Engine
- Electrical Drive
- Heavy Duty Belt
- Radial drive

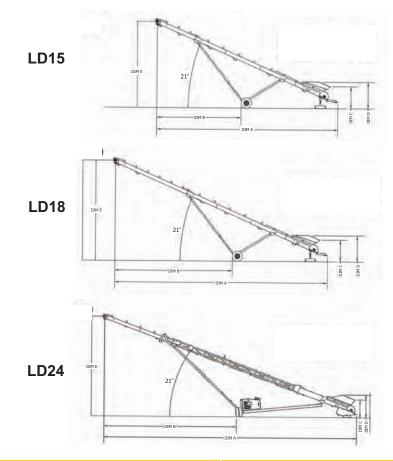

MODEL	WORKING DIMENSIONS					TRANSPORT DIMENSIONS				WIDTHS	
	DIM A	DIM B	DIM C	DIM D	DIM E	WIDTH	HEIGHT	LENGTH	WEIGHT	800 (32")	1050 (41")
LD15	14420 (568")	6718 (264")	1763 (69")	2114 (83")	6228 (245")	1780 (70")	1200 (47")	11600 (457")	2.9T (6,393lbs)	 Image: A start of the start of	v
LD18	17206 (677")	9504 (374")	1763 (69")	2114 (86")	7469 (294")	1200 (47")	2720 (107")	11850 (467")	3.4T (7,496lbs)	~	 Image: A start of the start of
LD24	22055 (868")	11569 (455")	1557 (61")	1986 (78")	8811 (347")	2658 (105")	1200-2270 (47" - 89")	17200 (677")	10.5T (23,149lbs)	v	v

While Striker Australia Pty Ltd makes every endeavour to ensure of the information presented in this brochure, we cannot be held liable in any way for any loss or damage for any inaccuracies or errors you may find. Striker Australia Pty Ltd cannot make any warranty as to the fitness of purpose of any goods, equipment or material in this brochure for your purposes and you must use your own endeavours and make your own enquiries in that regard. SP02SI79-1903