



# **STRIKER**

## **BUILT TO LAST**



## **STRIKER HQ1112E**

Australia +61 8 9437 3533 | Malaysia +605 366 8188 | China +86-21-5446-1581  
info@strikercrushing.com | www.strikercrushing.com

Unlimited Solutions  
for Limited Resources

# **TRACKED IMPACT CRUSHER**

# HQ1112E Features



**Vibrating Grizzly Feeder** - Feeding the material into the Impact Crusher and/or fines chute is a vibrating grizzly feeder including:

**Vibrating Unit** - Twin shaft exciter is mounted under the rear of the vibrating feeder. Driven by a single hydraulic motor and produces a forward linear motion.

**Pan** - The feeder floor is fitted with Hardox 400 bolted replaceable wear liners. These extend the quality and life of the feeder.

**Grizzly Section** - The grizzly section is a double step grizzly that is easily removed.

**Feed Hopper** - The feed hopper is manufactured from Hardox 400.

**Forward Product Conveyor** - The forward product conveyor is a 1200mm (3'11") wide, troughed belt conveyor with a fixed tail section and a discharge height of 3227mm (10'7") high.

**Side Discharge Conveyor (Optional)** - 600mm (2') wide giving a discharge height of approximately 2094mm (6'10"). The side discharge dirt conveyor is hydraulic folding.

**Fines Transfer Chute** - Fitted beneath the vibrating grizzly is the fines transfer chute.

## TECHNICAL SPECIFICATION

### Hopper

Capacity - 7m<sup>3</sup>/10m<sup>3</sup> (9yd<sup>3</sup>/13yd<sup>3</sup>)

### Crusher

Size (D x W) - 1120mm x 1210mm (44" x 48")

### Forward Product Conveyor

Width - 1200mm (3'11")  
Discharge Height - 3227mm (10'7")

### Side Conveyor (\*Optional)

Width - 600mm (2')  
Discharge Height (adj.) - 2094mm (6'10")

### Tracks

Length - 3840mm (12'7")  
Width - 400mm (1'4")

### Power Pack

Engine Power - CAT C4.4  
Diesel Tank - 640Litre (141gal)  
Hydraulic Tank - 600Litre (132gal)

### Performance

Capacity (up to) - 350T/hr  
Gap Setting - 5-150mm (0.2"-5.9")

### Operating Dimension

Length - 14636mm (48')  
Width - 4383mm (14'5")  
Height - 3947mm (12'11")  
Weight - 40.8T (89,949lbs)

### Transport Dimension

Length - 14940mm (49')  
Width - 2860mm (9'5")  
Height - 3580mm (11'9")

### Options:

Water Pump, Side Conveyor, Overband Magnet, Canvas Covers, Stacker Outlet

\*Subject to change without prior notice.

This chute transfers the material passing the grizzly bar setting onto either the forward product conveyor or the side discharge conveyor.


**Track Frame** - The track is manufactured from heavy-duty frame steel having 3840mm (12'7") longitudinal centres along with 400mm (1'4") wide tracks as a standard with an overall track width of 2860mm (9'5").

**Magnet (Optional)** - A magnetic cross-belt separator is suspended over the on-plant product conveyor (optional).

**Power Pack** - CATERPILLAR model C4.4 engine with electronic governing and emission control powers the plant.

**Extra Heavy Duty Rotor** - HD Impact Crushers incorporate heavy duty open disc style rotors with four blow bars as a standard. Providing high inertia ensures optimum crushing is achieved. The rotor is supported by bearings mounted in suitable solid housings manufactured from steel blocks with self-purging labyrinth seals.

**Hydraulic Impact Arms** - Impact plates are identical cast blocks that are interchangeable, thereby permitting optimum utilization. Gap settings between impact arm and rotor are adjusted via hydraulics to allow the product size to be controlled. If overloading, power failure, etc. causes material to exceed the pre-set pressure the impact arms retract in a controlled manner.

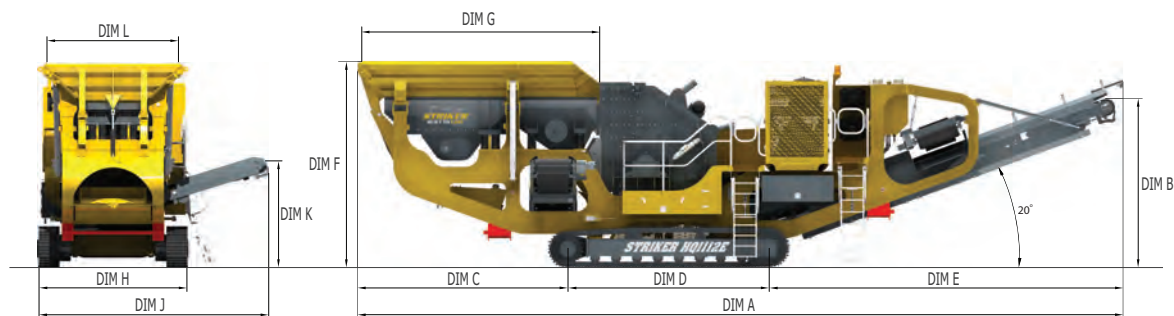

HQ1112E	WORKING DIMENSIONS											TRANSPORT			
	A	B	C	D	E	F	G	H	J	K	L	WIDTH	HEIGHT	LENGTH	WEIGHT
METRIC	14636	3227	4024	3840	6772	3947	4557	2860	4383	2094	2560	2860	3580	14940	40.8T
IMPERIAL	48'	10' 7"	13' 2"	12' 7"	22' 3"	12' 11"	14' 11"	9' 5"	14' 5"	6' 10"	8' 5"	9' 5"	11' 9"	49'	89,949lbs

\* - Weight Variable With Options

While Striker Australia Pty Ltd makes every endeavour to ensure of the information presented in this brochure, we cannot be held liable in any way for any loss or damage for any inaccuracies or errors you may find. Striker Australia Pty Ltd cannot make any warranty as to the fitness of purpose of any goods, equipment or material in this brochure for your purposes and you must use your own endeavours and make your own enquiries in that regard.

SPO2SI323-2000